


FRONT VIEW · 1:4



SIDE VIEW · 1:4

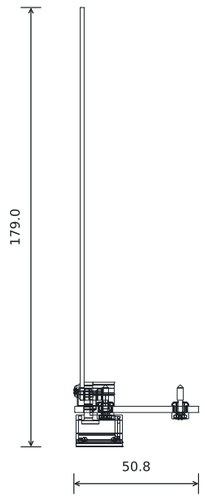

TOP VIEW · 1:2.5

HOLE LAYOUT (from manufacturer 2D)

Ø (mm)	QTY	VIEW	NOTE
2.00	20	FRONT	centre from arc cluster
0.60	8	FRONT	centre from arc cluster
5.00	8	FRONT	centre from arc cluster
2.50	7	FRONT	centre from arc cluster
1.10	6	FRONT	centre from arc cluster
1.32	6	FRONT	centre from arc cluster
2.20	6	FRONT	centre from arc cluster
5.50	6	FRONT	centre from arc cluster

17 hole groups · centres & Ø measured from the DXF front view

CONFIGURATION (manufacturer datasheet)

Height	6 U	266.7 mm
Rack width	10 HP	50.8 mm
Panel width	19"	50.8 mm

Geometry taken from the manufacturer 2D DXF (true scale, mm) — used where the STEP model is too large to convert. Dimensions are measured envelope values.

Rack width in HP and height in U follow IEC 60297-3-100: W = HP x 5.08 mm, U = 44.45 mm. Panel width 482.6 mm includes the 19" mounting flanges.

Reference only — for fit and interface checking. Confirm tolerances against the official drawing before design freeze.

DWG 20817-458-DWG-01 DATE 2026-11-16

C-BOX ELECTRONIC TECHNOLOGY

Kunshan · Jiangsu, China · c-box-tech.com

PN **20817-458**

TITLE

non shielded, trapezoide, plastic, type 1, grey

REFERENCE · taken from manufacturer 2D data

NOT FOR MANUFACTURING · mm