
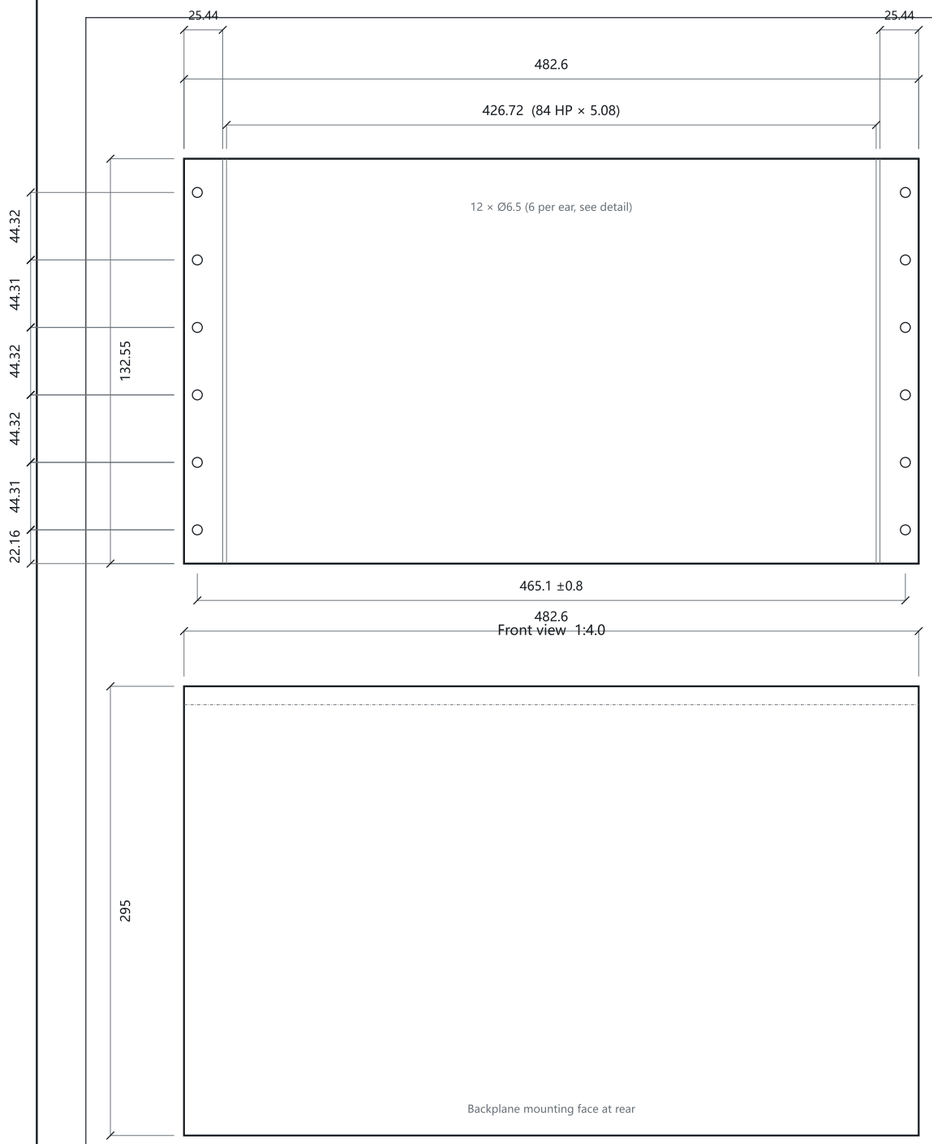



Front view 1:4.0

Top view 1:4.0 (front / mounting face at top)

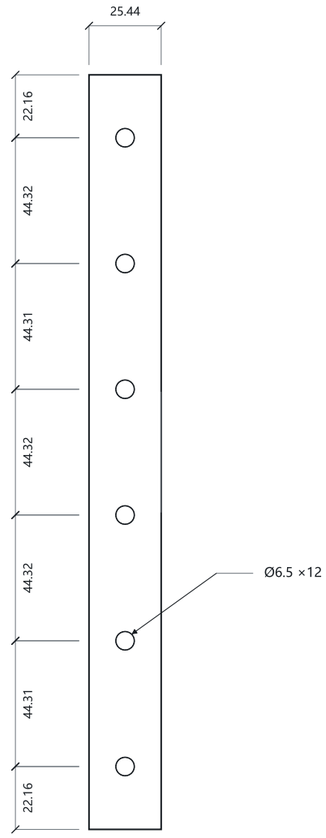


19" mounting holes, detail 1:2.2

| | Interface data |
|---|---|
| Hole pitch (L-R) | 465.1 ±0.8 mm |
| Hole diameter × qty | Ø6.5 × 12 (6 per ear) |
| Hole centers from bottom | 22.16 / 66.47 / 110.79 / 155.11 / 199.42 / 243.74 mm |
| Mounting flange width | 25.44 mm |
| Outline envelope W×H×D | 482.60 × 265.90 × 295.00 mm |
| Inner width (side panels) | 426.72 mm (84 HP) |

**Basis**

1. 19" mounting holes per IEC 60297-3-100 / -101: pitch 465.1±0.8, hole Ø6.5;
2. Outline width 482.6 = 84 HP × 5.08; frame height 265.90 = 6 U × 44.45 − 0.8;
3. Depth 295 is catalog nominal, consistent with vendor published data (catalog & product page);
4. Interface dimension drawing for mounting selection; internal construction, material and finish not covered;
5. Contact C-BOX sales to confirm details before final installation.

Drawn by C-BOX. Contains no third-party vendor drawing content.

| | |
|---|---|
| **C-BOX TECHNOLOGY** | Outline & Hole Layout |
| DWG No. DRW-24563-981 | Scale 1:4.0 (top 1:4.0) · mm · First angle |
| 19" Subrack 6U × 84HP × D295 | |

| | | | | | |
|---|---|---|---|---|---|
| DWG No. DRW-24563-981 | Date 2026-11-16 | Rev A | Drawn C-BOX | Data basis: see notes |