



FRONT VIEW · 2:1



SIDE VIEW · 2:1

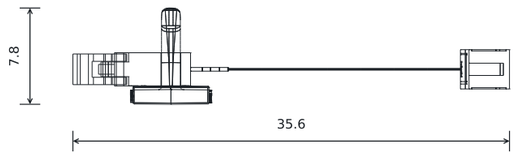

TOP VIEW · 2:1

HOLE LAYOUT (from manufacturer 2D)

Ø (mm)	QTY	VIEW	NOTE
0.70	12	FRONT	centre from arc cluster
0.20	4	FRONT	centre from arc cluster
3.00	4	FRONT	centre from arc cluster

3 hole groups · centres & Ø measured from the DXF front view

CONFIGURATION (manufacturer datasheet)

Panel width	19"	35.6 mm

Geometry taken from the manufacturer 2D DXF (true scale, mm) — used where the STEP model is too large to convert. Dimensions are measured envelope values.

Rack width in HP and height in U follow IEC 60297-3-100: W = HP x 5.08 mm, U = 44.45 mm. Panel width 482.6 mm includes the 19" mounting flanges.

Reference only — for fit and interface checking. Confirm tolerances against the official drawing before design freeze.

DWG 20817-877-DWG-01 DATE 2026-11-16 **C-BOX ELECTRONIC TECHNOLOGY** Kunshan · Jiangsu, China · c-box-tech.com	PN **20817-877**
TITLE	Mircoswitch for XL handle
REFERENCE · taken from manufacturer 2D data	NOT FOR MANUFACTURING · mm